
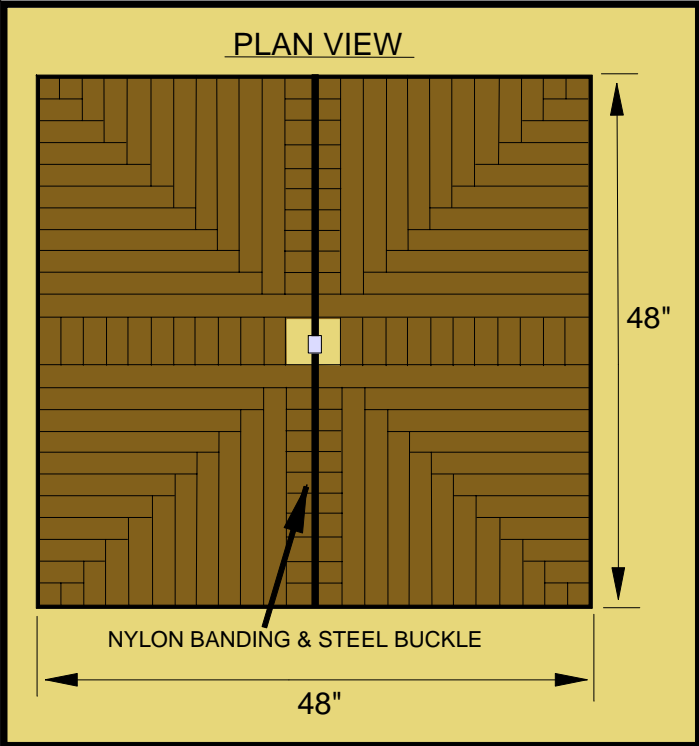
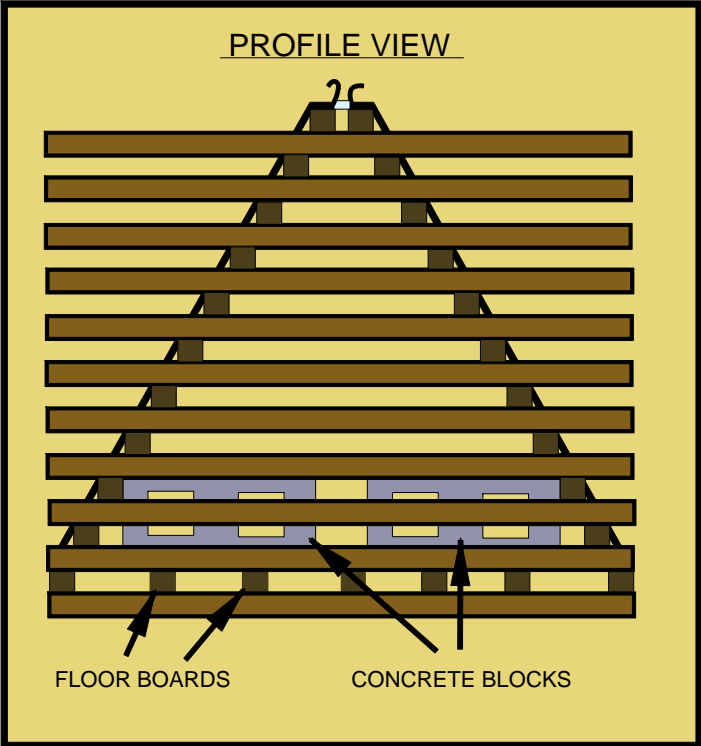


# PENNSYLVANIA PORCUPINE CRIB STRUCTURE STANDARD DRAWING

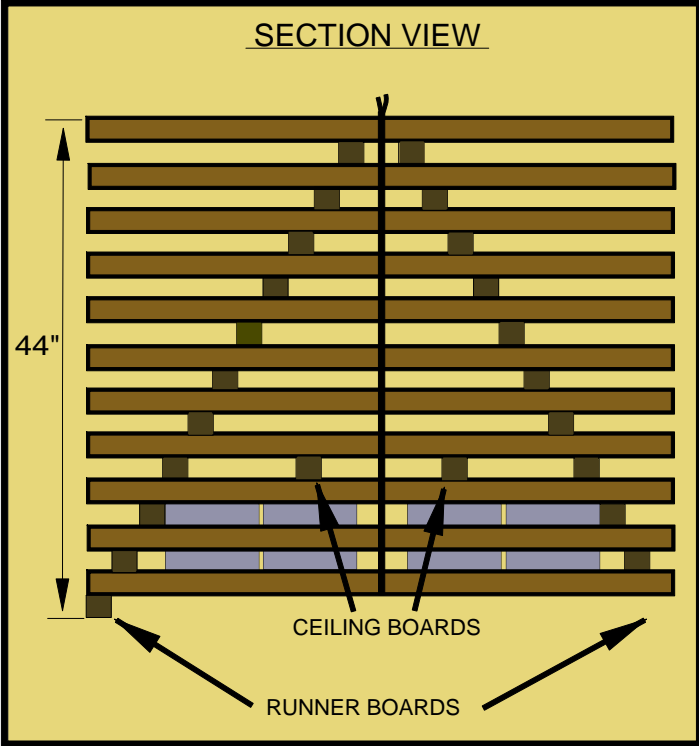

MATERIALS AND NOTES

MATERIALS:  
 ROUGH CUT HEMLOCK LUMBER 2" x 2" x 4'- 50 PIECES  
 8" x 8" x 16" 2 CORE CONCRETE BLOCKS- 8 TOTAL  
 16D COMMON NAILS- 2 LBS. ( OR 2 STRIPS OF 12D)  
 1/2" NYLON BANDING- 18'  
 1 STEEL BUCKLE

NOTES:  
 LUMBER MUST BE TRUE DIMENSIONAL  
 LUMBER MUST BE GREEN (FRESH CUT)  
 YELLOW POPLAR MAY BE SUBSTITUTED FOR HEMLOCK  
 CONCRETE BLOCKS MINIMUM WEIGHT: 35 LBS  
 NYLON BANDING: 600 LBS TENSILE STRENGTH  
 NOT TO SCALE  
 ALL SIZES ARE APPROXIMATE  
 FIT IN FIELD