



PENNSYLVANIA TURTLE BASKING PLATFORM STANDARD DRAWING


PROFILE VIEW

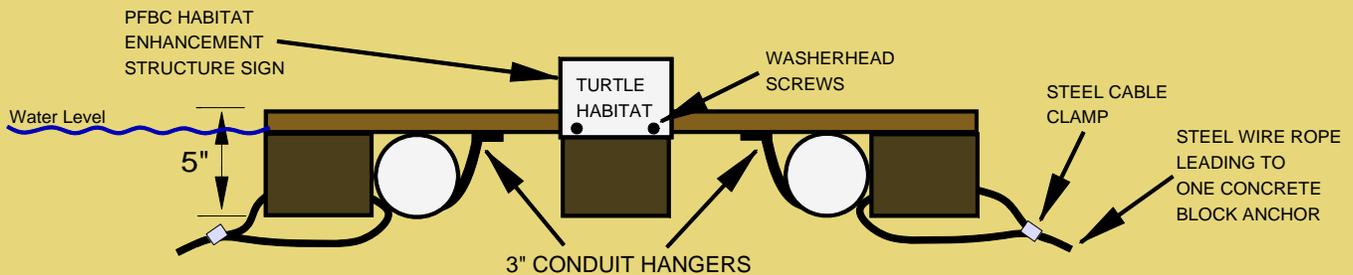

SECTION VIEW

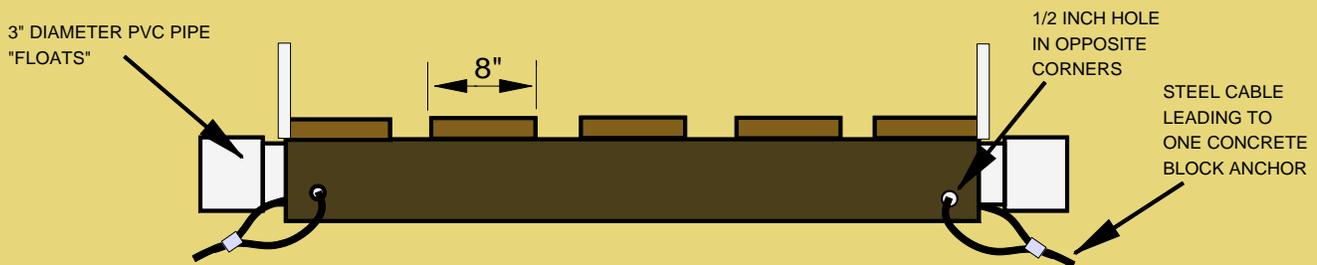

PLAN VIEW

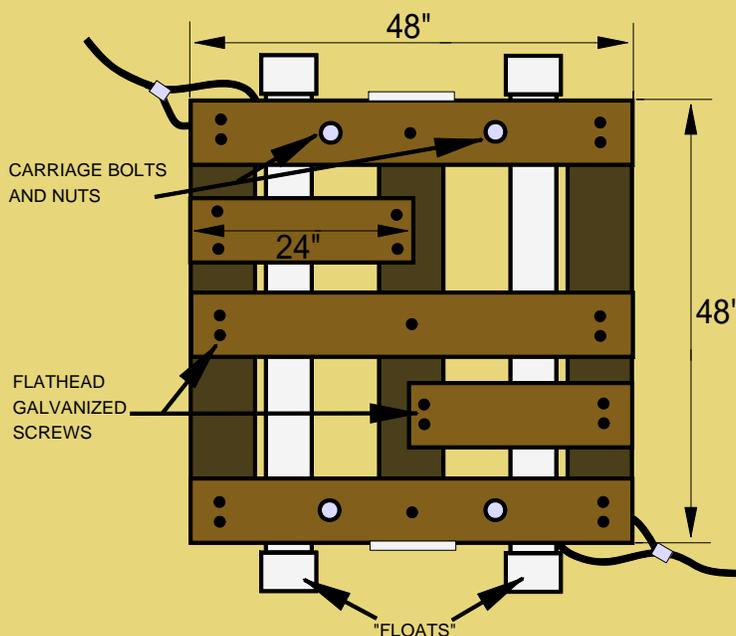

MATERIALS AND NOTES

MATERIALS:

- ROUGH CUT HEMLOCK LUMBER 1" X 8" X 4' - 3 PIECES
- ROUGH CUT HEMLOCK LUMBER 1" X 8" X 2' - 2 PIECES
- ROUGH CUT HEMLOCK LUMBER 4" X 4" X 4' - 3 PIECES
- 2 CORE CONCRETE BLOCK 8" X 8" X 16" - 2 PIECES
- #10 X 3" FLATHEAD GALVANIZED SCREWS- 26 PIECES
- #10 X 1" WASHERHEAD GALVANIZED SCREWS- 8 PIECES
- 1/2 X 2" CARRIAGE BOLTS AND NUTS- 4 EACH
- 1/4" STAINLESS STEEL WIRE ROPE 10' - 2 PIECES
- 1/4" STAINLESS STEEL CABLE CLAMPS- 4 PIECES
- 3" CONDUIT HANGERS- 4 PIECES
- 3" DIAMETER SCHEDULE 40 PVC PIPE 5' - 2 PIECES
- 3" DIAMETER PVC END CAPS- 4 PIECES
- PVC PIPE CEMENT AND CLEANER
- PFBC HABITAT ENHANCEMENT SIGNS- 2 PIECES

NOTES:

- LUMBER MUST BE TRUE DIMENSIONAL
- YELLOW POPLAR MAY BE SUBSTITUTED FOR HEMLOCK
- LUMBER MUST BE GREEN (FRESH CUT)
- CONCRETE BLOCKS MINIMUM WEIGHT: 35 LBS
- NOT TO SCALE
- ALL SIZES ARE APPROXIMATE
- FIT IN FIELD